


CONCRETE CONTAINER

TECHNICAL SPECIFICATIONS

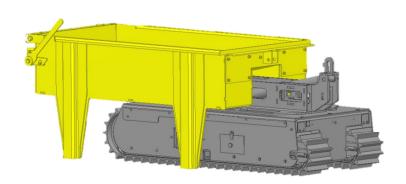

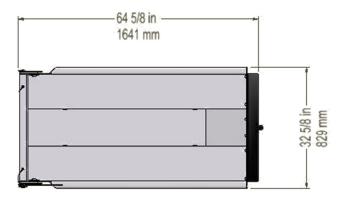

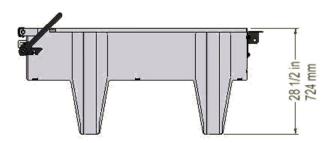

| PHYSICAL CHARACTERISTICS | | |
|---|----------------------------|---------------------|
| Material | Aluminum and steel | |
| Length | 64 ^{5/8} in | 1641 mm |
| Width | 32 ^{5/8} in | 829 mm |
| Height | 28 ^{1/2} in | 724 mm |
| Wreight | 195 lb | 89 kg |
| Volume | 1 5 pi ³ | 0.42 m ³ |
| Load bearing capacity* (inclined surface) | 600 lb at 40° | 272 kg at 40° |
| Load bearing capacity* (on stairs) | 600 lb at 40° | 272 kg at 40° |
| Load bearing capacity* (flat surface) | 1705 lb | 775 kg |



| COMPATIBLE WITH: | |
|------------------------------------|--|
| Lifting device | |

^{*} These load bearing capacities have been tested with a Twin-Track 66 model. Contact your dealer to know the load bearing capacities of this accessory when it is used with other Track-O models.

The information contained in this document is subject to change without notice.

